



Sealed Lead-Acid Battery

Absorbant Glass Mat (AGM) technology for superior performance. Valve regulated, spill proof construction allows safe operation in any position. Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified. U.L. recognized under file number MH 20567.

UPG No. 40653

UB16600

Maintenance-Free



Specification

Nominal Voltage	16V (8 cells)		
Nominal Capacity	77° F (25° C)		
20-hr. (3A)	60 Ah		
10-hr. (5.58A)	55.8 Ah		
5-hr. (10.2A)	51.0 Ah		
1-hr. (36A)	36.0 Ah		
Approximate Weight	50.71 lbs (23.0 kgs)		
Internal Resistance (approx.)	12mΩ		
Shelf Life (% of normal capacity at 77° F (25° C))			
3 Months	6 Months	12 Months	
91%	82%	64%	
Temperature Dependency of Capacity	(20 hour rate)		
104° F	77° F	32° F	5° F
102%	100%	85%	65%

Charge Method (Constant Voltage)


Cycle Use (Repeating Use)

Initial Current	18 A or smaller
Control Voltage	19.2 - 19.8 V

Float Use


Control Voltage	18.2 - 18.4 V
-----------------	---------------

Physical Dimensions: in (mm)




L: 10.24in (260 mm)
W: 6.65in (169 mm)
H: 8.37in (212.5 mm)
TH: 8.44in (214.5 mm)
 Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.


Terminals




Battery Charging Characteristics for Cyclic Use

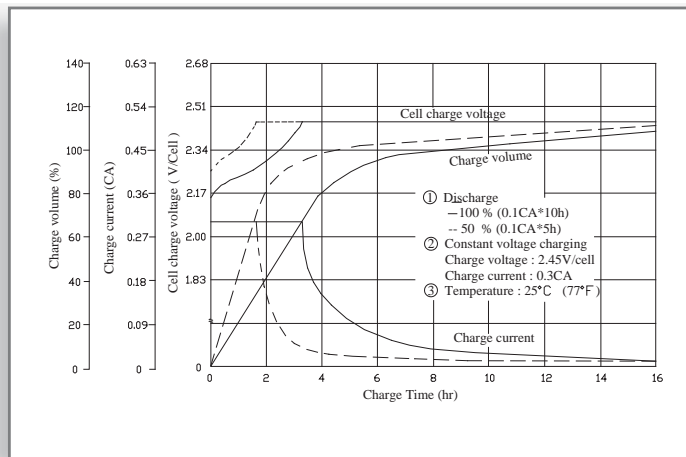


Battery Charging Characteristics for Standby Use

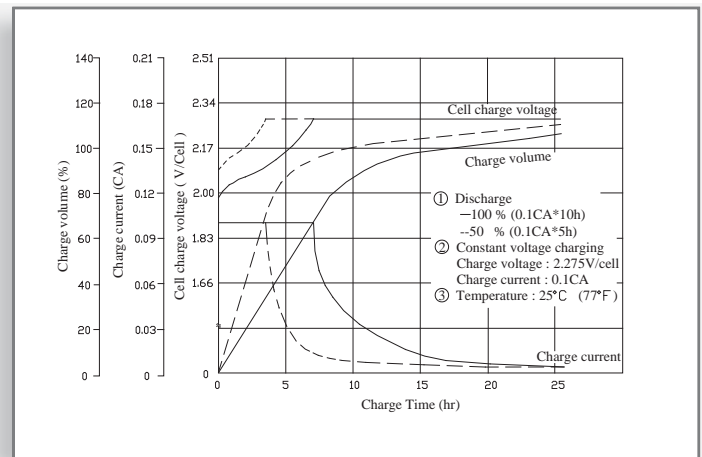


Discharge Time vs. Discharge Current

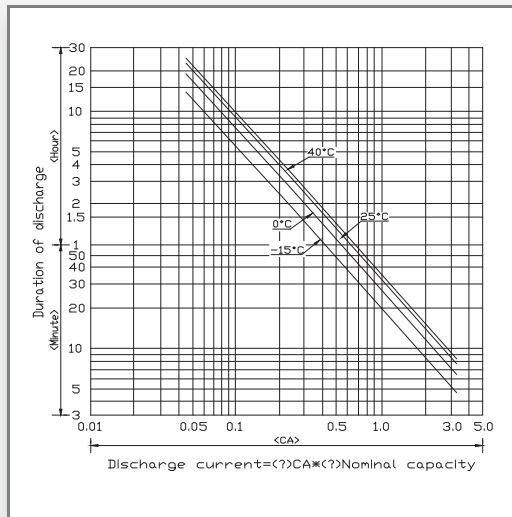


Discharge Characteristics

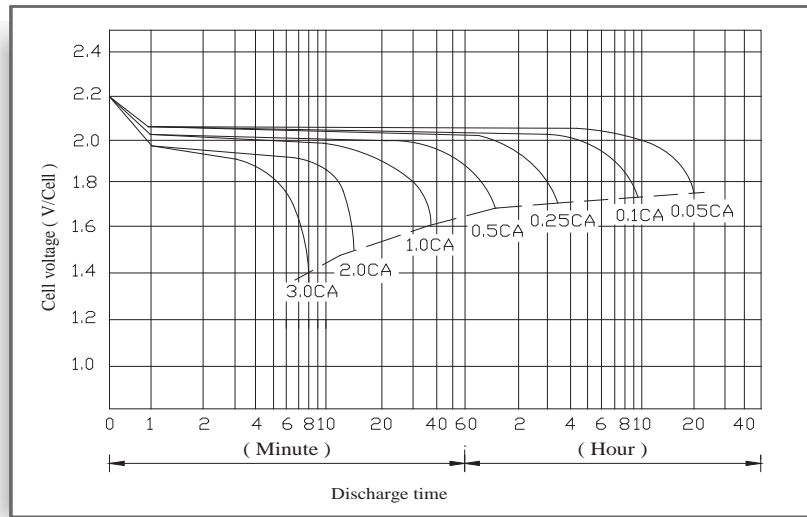


Shelf Life & Storage

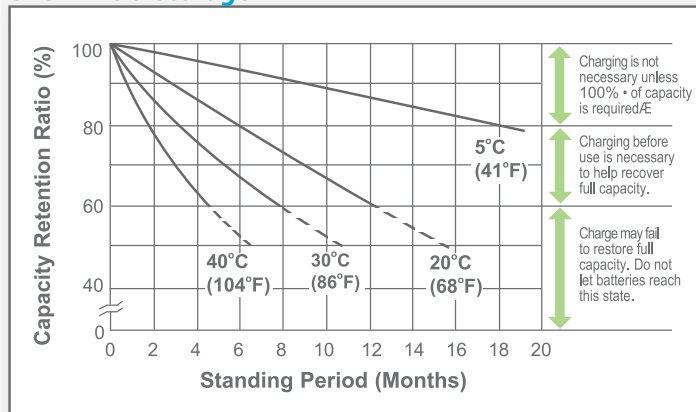

Cycle Life vs Depth of Discharge

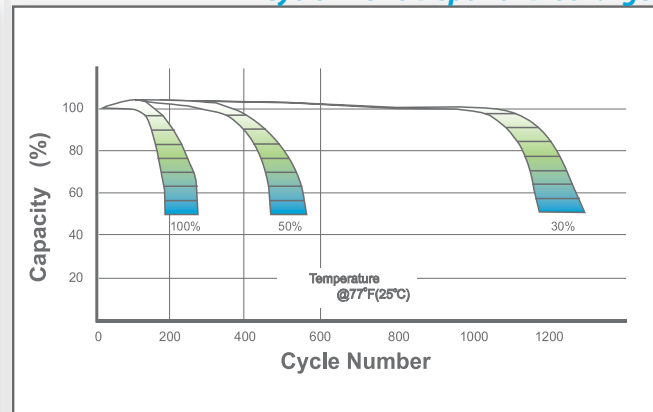

Effect of Temperature on Capacity

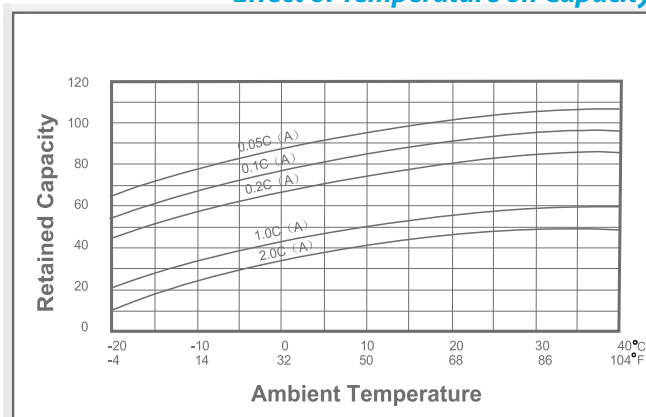

Charge Current & Final Discharge Voltage

Application	Charge Voltage(V/Cell)			Max.Charge Current	Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
	Temperature	Set Point	Allowable Range						
Cycle Use	25°C(77°F)	2.45	2.40-2.50	0.30C	Discharge	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C
Standby	25°C(77°F)	2.325	2.30-2.35		Current(A)				



Let UPG Power Your Life.

www.upgi.com