

STAY POWERED* Short Circuit Protection, Over Current Protection, Over Voltage Protection, and Polarity Reversal

12BC0500D-1

Specification


Input Voltage	120 VAC	
Input Frequency	60 Hz	
Output Voltage		
Bulk Charge	14.7 VDC ± -0.2V	
Float Charge	13.6 VDC ± -0.3V	
Output Current		
Bulk Charge	500 mA Max.	
Input Power (Watts)	18 W	
Battery Size Range	1.5 ~ 5 Ah	
Operating Temperature	-10°C ~ +40°C	
Storage Temperature	-20°C ~ +80°C	
Standards	CULUS	



LED Status Indication

Charging LED = Red
Fully Charged LED = Green

Dimensions: in(mm)

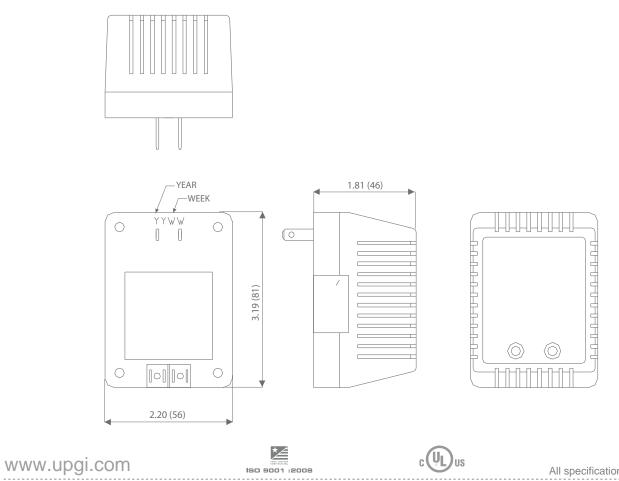

All specifications subject to change.

1720 Hayden Drive | Carrollton, Texas 75006 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@upgi.com